


MSD-60

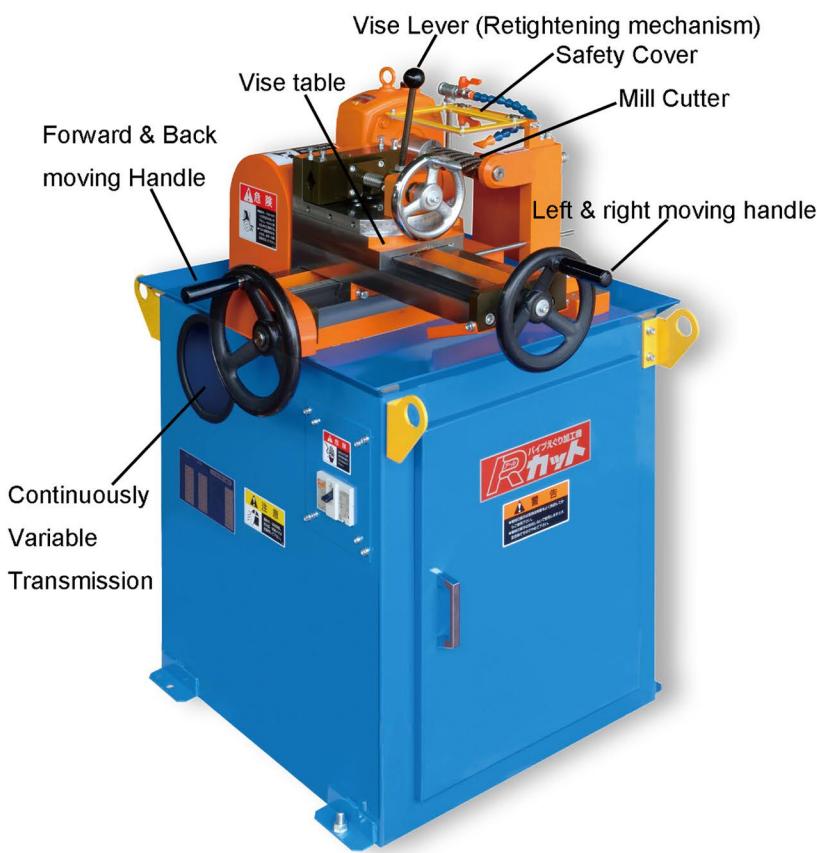

Features

- CVT (Continuously Variable Transmission) is adopted. One Hand Gear shifting is OK.
- Suitable rotation speed for cutter speed can be obtained.
- Wide range of rotation frequency.
- Rotation table for smooth angle notching.
- Clamp vise has retightening mechanism. It can hold the work piece firmly.
- Excellent processing ability. (Max. Dia. 60.5mm)
- The notching angle can be made larger.
- The entire blade can be used by transverse sliding mechanism.

■ Specification


Model	MSD-60
Main Motor	200V., 3-Phase, 0.75kw x 4P (50/60 Hz)
Main Shaft Rotation Frequency	50Hz/36~187 r.p.m. 60Hz/43~225 r.p.m.
Cooling Method	Water soluble cutting oil (Trochoid Pump)
Chuck	Manual (with Retightening function)
Cutting Feed	Manual
Notching Angle	0°~60°
Processing Ability	Notching / Dia. 12.7~60.5mm Piercing / Dia. 4~40mm
Size	W 860 x L 710 x H 980 mm
Weight	170 kgs

Remarks:

* The blade is not included in Machine unit. Please select MHG Mill Cutter.


* Specification may change without notice.

Various Notching processing.

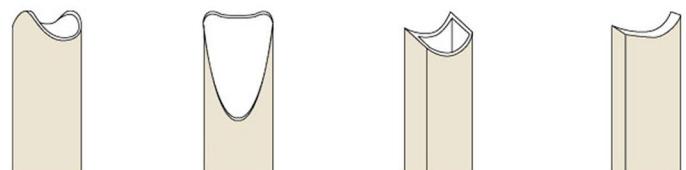

Notching 60° Notching Square Pipe Flat Bar
 * Hole processing by this machine is auxiliary.
 Authentic hole processing must be done by dedicated hole processing machine.

Example of use

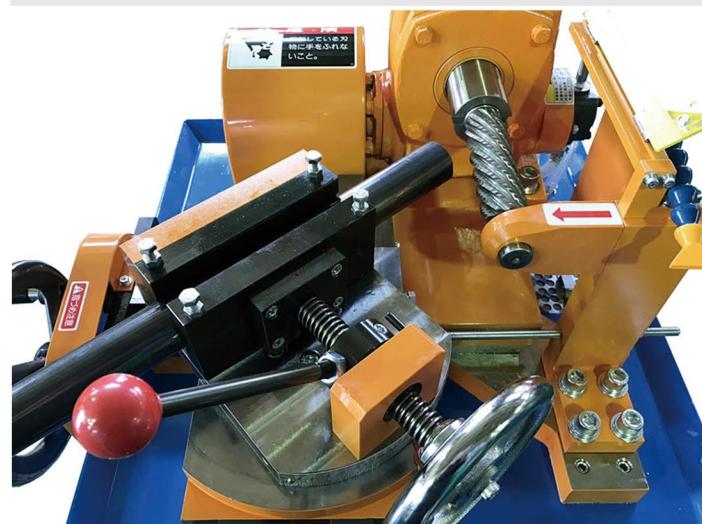

Angle Notching of MSD-60