

ROBOMATE is a Nozzle Cleaner for Welding Robot that can remove spatter inside Nozzle and adhere Anti-Spatter Agent Automatically!!


Stainless Steel Body



RNP-7 (Spring Type)



RNP-5-VC
(Wire Cutting)

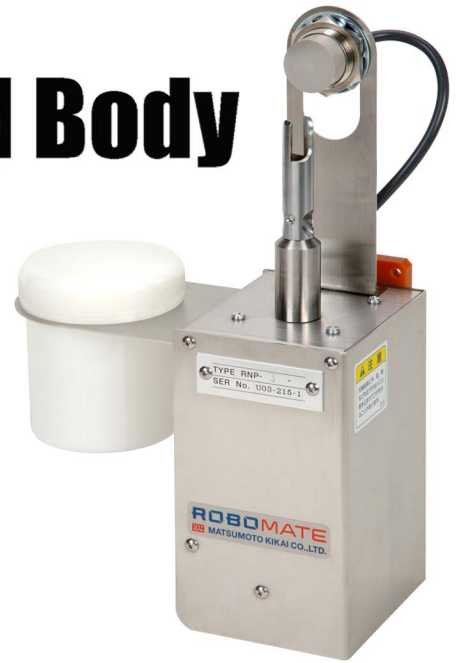

RNP-3 (Reamer Type)

■ **Features**

- **INTERFACE IS NOT REQUIRED.**

Proximity Sensor is provided at each function to detect Welding Nozzle. So, MAC Nozzle Cleaner can be operated with any welding robot.

- Stainless Steel Body can prevent rust caused by drip of Anti Spatter Agent.
- Increasing Productivity & Welding Quality by using Nozzle Cleaner & Wire Cutter together as a set!!

Model	Applicable Nozzle I.D.	Air Supply	Rolling Torque	Rolling Speed 50/60Hz	Anti Spatter Agent	Weight
RNP-3 (Reamer Type)	φ8,10,12,13,14,15,16,17,18,19,20	-	0.9/0.8 [N.m]	40/48 [r.p.m.]	Proteca J	3 kgs
RNP-5-VC	Wire Max. Dia. 1.6mm	0.5MPa (5kgf/cm2)	-	-	-	2.5 kgs
RNP-7 (Spring Type)	φ12 & 16	-	0.1/0.09 [N.m]	1250/1550 [r.p.m.]	Proteca S	3.1 kgs

Power Supply: AC 100V., 50/60Hz., 1-Phase

MATSUMOTO KIKAI CO., LTD.

4-6-22, Honmachi, Chuo-ku, Osaka, 541-0053, Japan

TEL: 81-6-4705-4777 FAX: 81-6-4705-4781

E-Mail: welox@pop21.odn.ne.jp

Website: <http://www.mac-wels.co.jp/>