




Vertical Type Tungsten Electrode Sharpener

Model: TTA-60C

■ Features:

- Vertical Grinding Direction!
- Grinding Angle 15° / 30° / 45° / 60° / 75° / 90° can provide us accurate grinding!!
- The electrode can be held tightly by collet lock Plate.
- Collet Holder support is sliding type, so the all surface of the diamond disk can be used.
- The electrode length min. 20mm can be grinded.
- * Min. grinding angle is 45°.
- * Long collet (optional item) can grind min. 15mm length electrode.
- Dia. 1.6mm / 2.4mm / 3.2mm collet are applicable.
- * Dia.1.6mm & Dia. 2.4mm collet are standard items for TTA-60C.
- The dust after grinding is collected by the tray which is installed at the lower part.

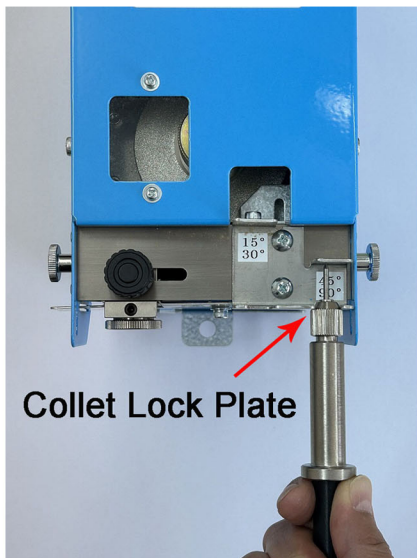

Collet Lock Plate



Dust Collecting Tray

Model	TTA-60C	
Power Supply	AC 100V ± 10%	
Rated Frequency	50Hz	60Hz
Rated rotation frequency	2475 r.p.m.	2950 r.p.m.
Rated Amp.	1.3A	1.5A
Rated output	60W	
Use rate	100% (continuously)	
Grinding Angle	15° - 90°	
Available Tungsten Electrode Dia.	<Standard Collet> Dia. 1.6mm, Dia. 2.4mm (Dia. 3.2mm) <Long Collet> (Dia. 1.6mm), (Dia. 2.4mm), (Dia. 3.2mm)	
Weight	6.4 kgs	
Size	139 (W) x 243 (D) x 216 (H) mm	